



NEW

# NDS3403 DVB-S2X Modulator

- > Support RF CID
- > Compatible with DVB-S/S2



ControlCast Jupiter

### DVB Carrier ID Extraction

Setting in NDS3403 Web management

CID MAC	00 : AA:BB:CC:DD:EE:FF:00:11	CN
Latitude	06 ° 55 ' 36 North	CN
Longitude	026 ° 21 ' 44 East	CN
Phone Number	+086011223344556677	<input type="checkbox"/> ext. CN
User Data	5555252525252	CN

Apply    Get Config

---

Global Unique Identifier	AA:AA:BB:CC:DD:EE:FF:00:11	●
Format	1	●
Latitude	6.55.36, N	●
Longitude	26.21.44, E	●
Telephone	+086011223344556677	●
User Data	5555252525252	●

Commands List: [Demod 1] TX TX 11 21 3B9ACA0001A39DE002020000000000000000000000004C4B40

Get\_Address Set\_Demod\_Config RX TX 11 21

Connected ● Traffic ● Alarm ● Demod/FEC 1 ● Demod/FEC 2 ● ASI 1 ● ASI 2 ●

CID TEST SAMPLE ILLUSTRATION


## Outline

DEXIN NDS3403 is a high-performance modulator developed according to DVB-S2X (EN302 307-2) standard which is the standard of third generation of the European broadband satellite telecommunication. It is to convert the input ASI and IP signals alternatively into digital DVB-S/S2/S2X RF output. BISS scrambling mode is inserted to this DVB-S2X modulator, which helps to safely distribute your programs. It is easy to reach local and remote control with NMS software and LCD in the front panel. With its high cost-effective design, DEXIN NDS3403 DVB-S2X modulator is wildly used for broadcasting, interactive services, news gathering and other broadband satellite applications.

## Features

- Fully complying with DVB-S (EN300 421), DVB-S2 (EN302 307-1) and **DVB-S2X** (EN 302 307-2) standard
- 4 ASI inputs supporting hot backup (3 for backup)
- Support IP (100M) signal input
- QPSK, 8PSK, 16APSK, 32APSK, **8PSK-L, 16APSK-L, 32APSK-L** Constellations
- **Support RF CID setting**
- Constant temperature crystal oscillator, as high as 0.1ppm stability
- Support coupling 10Mhz clock output through RF output port
- Support 24V power output through RF output port
- Support BISS scrambling
- Support local and remote control with SNMP or Web-server NMS
- Support SFN TS (with MIP or IIP) transmission

## Principle Chart

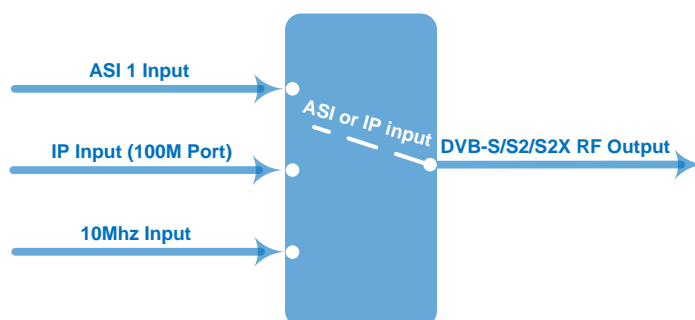

# Specifications

<b>ASI Input</b>	Supporting both 188/204 Byte Packet TS Input			
	4 ASI Inputs, Supporting Hot Backup			
	Connector: BNC, Impedance 75Ω			
<b>IP Input</b>	1*IP Input (Rj45, 100M TS Over UDP)			
<b>SFN output</b>	MIP or IIP			
<b>10MHz Input</b>	1*10Mhz Input (BNC Interface)			
<b>RF Output</b>	RF Range: 950 ~ 2150 MHz, 10KHz stepping			
	Output Level Attenuation: -10.0 dBm~-41.5 dBm, 0.5dB Stepping			
	MER≥36dB			
	Connector: N type, impedance 50Ω			
<b>Channel Coding and Modulation</b>	Standard	<b>DVB-S</b>	<b>DVB-S2</b>	<b>DVB-S2X</b>
	Outer coding	RS Coding	BCH Coding	BCH Coding
	Inner coding	Convolution	LDPC Coding	LDPC Coding
	Constellation	QPSK	QPSK, 8PSK, <b>16APSK, 32APSK</b>	QPSK, 8PSK, 16APSK, 32APSK <b>8PSK-L, 16APSK-L, 32APSK-L</b>
	FEC/ Convolution Rate	1/2, 2/3, 3/4, 5/6, 7/8	<b>QPSK:</b> 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 <b>8PSK:</b> 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 <b>16APSK:</b> 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 <b>32APSK:</b> 3/4, 4/5, 5/6, 8/9, 9/10	<b>QPSK:</b> 13/45, 9/20, 11/20 <b>8PSK:</b> 23/36, 25/36, 13/18 <b>16APSK:</b> 26/45, 3/5, 28/45, 23/36, 25/36, 13/18, 7/9, 77/90 <b>32APSK:</b> 32/45, 11/15, 7/9 <b>8PSK-L:</b> 5/9, 26/45 <b>16APSK-L:</b> 5/9, 8/15, 1/2, 3/5, 2/3 <b>32APSK-L:</b> 2/3
	Roll-off Factor	0.2, 0.25, 0.35	0.2, 0.25, 0.35	0.05, 0.10, 0.15
	Symbol Rate	0.5~45 Msps	0.5~40 Msps (32APSK); 0.5~45 Msps (16APSK/8PSK/QPSK)	0.5~40 Msps (32APSK, 32APSK-L); 0.5~45 Msps (16APSK/8PSK/QPSK/16APSK-L/8PSK-L)
	BISS Scramble	Mode 0, mode 1, mode E		
	<b>System</b>	SNMP/Web-server NMS		
Language: English				

	Ethernet software upgrade	
	24V power output through RF output port	
<b>Miscellaneous</b>	Dimension	482mm×410mm×44mm
	Weight	4.3 KG
	Temperature	0~45℃(operation), -20~80℃ (storage)
	Power	100-240VAC ±10%,50Hz-60Hz
	Consumption	25W

## Order Guide

	NDS3402E	NDS3403
DVB-S/S2	●	●
DVB- S2X		●
QPSK, 8PSK, 16APSK, 32APSK Constellation	●	●
8PSK-L,16APSK-L,32APSK-L Constellation		●