




**NDS3508C**

**IPTV Modulator**

**HTTP/UDP/RTP/RTSP/HLS**



**DVB-C/T/ISDBT/ATSC RF Out**

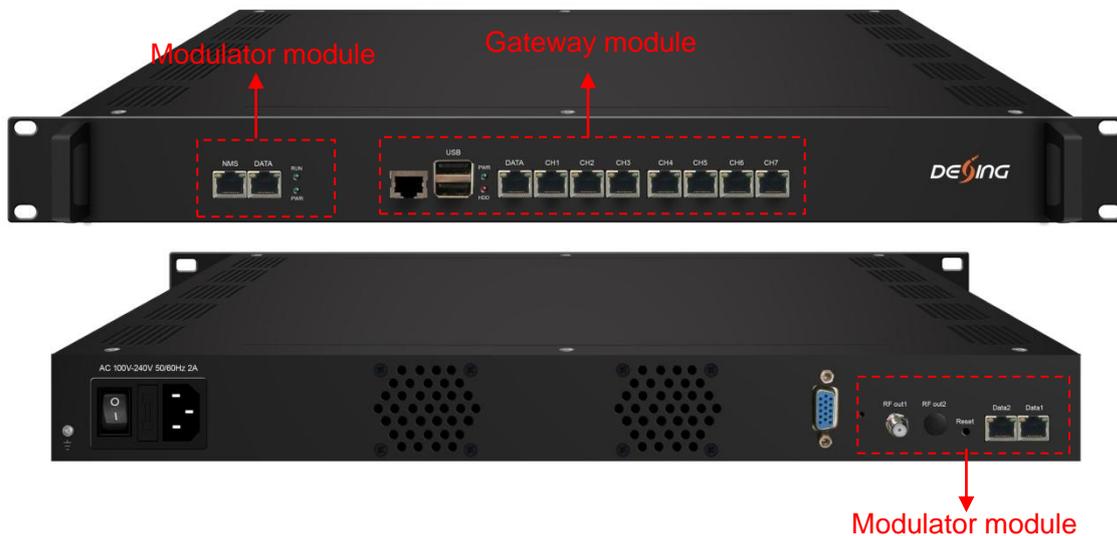

## Outline

Dexin NDS3508C IPTV modulator is a high integration device which is combined with two independent modules. One is IPTV gateway module which is used for the protocol conversion scenarios and streaming media distribution scenarios and it can convert the network IP stream over HTTP, UDP, RTP, RTSP, HLS and TS file into HTTP, UDP, HLS and RTMP protocol. The other is modulator module which supports IP in and IP out and DVB-C/T/ISDBT/ATSC RF out, and it can receive gateway source directly. So NDS3508C achieves IP (HTTP, UDP, RTP, RTSP and HLS) in to RF out in one box.

In conclusion, its high performance makes it widely used in CATV digital head-end, business application, IPTV/OTT system, etc. and it provides various solutions for operators to re-distribute programs.



All the specifications are subject to change without any further notice. All rights reserved.

Add: No. 10 & No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, PR China  
www.dsdvb.com/English Tel: +86-028-85558928 Fax: +86-028-85585255 Email: sunyu@dsdvb.com


## Key Features

- 1 IPTV gateway module +1 IP modulator module, and they can work independently
- IP in (HTTP, UDP, RTP, RTSP and HLS) to RF out in one box
- Gateway Module:
  - ✧ 8 Data ports:
    - First Data port: IP out over HTTP, UDP (SPTS), HLS and RTMP
    - Data CH1-7 ports: IP in over HTTP, UDP (SPTS), RTP (SPTS), RTSP and HLS  
IP out over HTTP, HLS and RTMP (Unicast)
  - ✧ Transmitting IP to modulator module through Data port
  - ✧ Support **adding scrolling caption, welcome words, boot picture and boot video** (this function is only applicable to IP out application and the STB/Android TV must be installed Dexin IPTV APK)
  - ✧ Support downloading Dexin IPTV APK directly from this module
- Modulator Module:
  - ✧ IP input over UDP/RTP through Data/Data 1/2 port
  - ✧ IP output over UDP/RTP/RTSP through Data 1/2 port
  - ✧ Support 16 DVB-C/8 DVB-T/6 ISDBT/8 ATSC RF out
  - ✧ Receiving IP from gateway module directly through Data port
- Support **IP anti-jitter** function
- Control the 2 modules separately via web-based NMS management
- Support TS files uploading through Web management

## IP Protocol Conversion



## Principle Chart

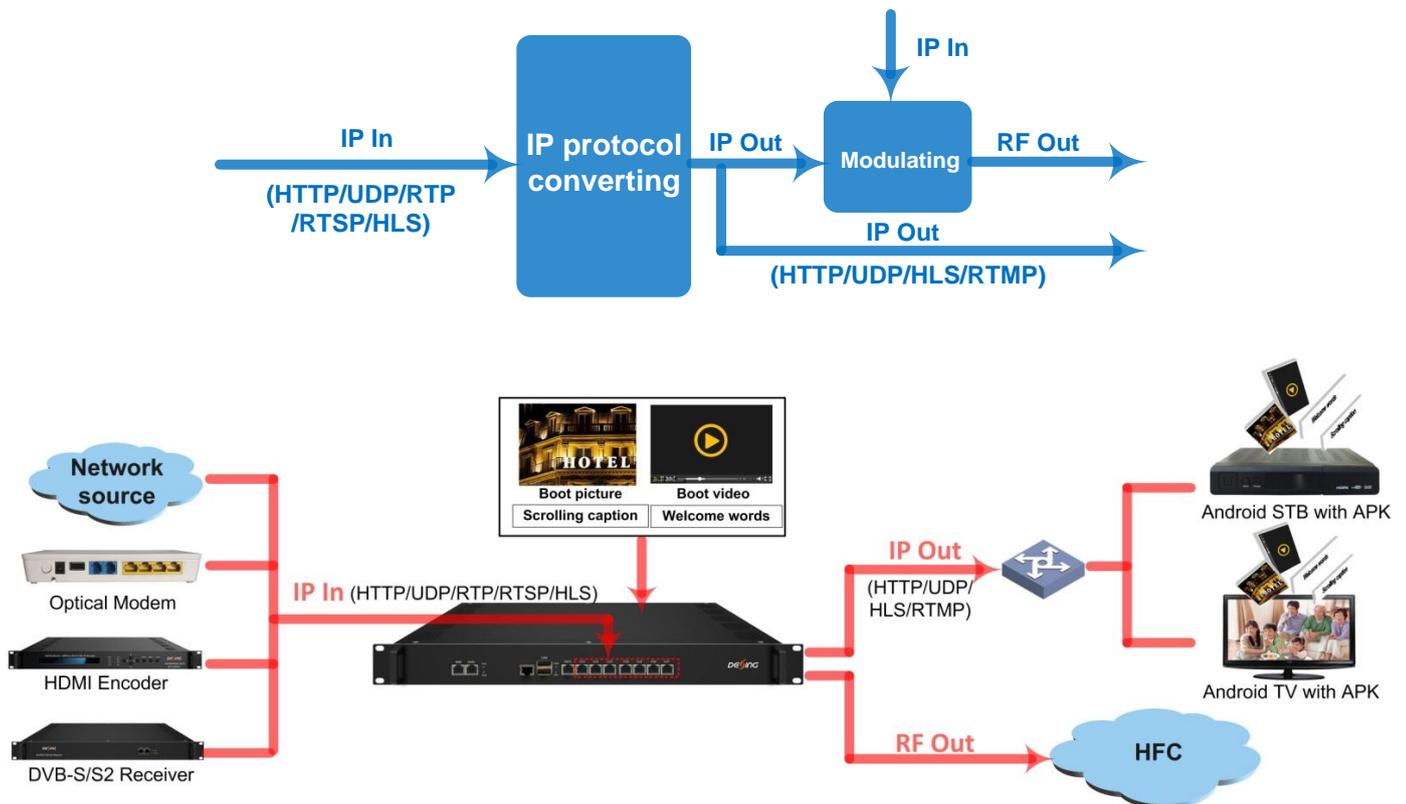

Scrolling caption/welcome words/boot picture/boot video is only applicable to IP out application and the STB/Android TV must be installed Dexin IPTV APK

## Specifications

### IPTV gateway module

|   |   |
|---|---|
| <b>Input</b>  | IP input thru CH 1-7(1000M) over HTTP, UDP(SPTS), RTP(SPTS), RTSP (over UDP, payload: mpeg TS) and HLS  |
|   | TS files uploading through Web management   |
| <b>IP output</b>                                      | IP out thru DATA port (1000M) over HTTP (Unicast), UDP(SPTS, Multicast) HLS and RTMP (Program source should be H.264 and AAC encoding)  |
|   | IP out thru CH 1-7(1000M) over HTTP/ HLS/RTMP (Unicast)   |
| <b>System</b>   | Memory: 4G  |
|   | Solid-State Disk(SSD): 16G  |
|   | Channel switching time with DEXIN' STB: HTTP (1-3s), HLS (0.4-0.7s)   |
|   | Support adding scrolling caption, welcome words, boot picture and boot video (this function is only applicable to IP out application and the STB/Android TV must be installed Dexin IPTV APK) |
|   | Support downloading Dexin IPTV APK directly from this module  |
|   | Play programs with APK downloaded android STB and TV, maximum 150 terminals   |
| Support about 80 HD/SD programs (Bitrate: 2Mbps) When |   |

|  |   |
|--|---|
|  | HTTP/RTP/RTSP/HLS is converted into UDP (Multicast), the actual application shall prevail, and <b>suggest maximum 80% CPU utilization</b> |
|  | web-based NMS management thru module's DATA port  |

**Modulator module (Taking Dexin's DX316/DX308T/DX306I/DX308AT modulator module as examples)**

|  |                   |  |   |               |
|--|-------------------|--|---|---------------|
| <b>Input</b>                             | DX316 (DVB-C)     | 512 IP (MPTS/SPTS) input over UDP/RTP, 2 100/1000M Ethernet Port |   |               |
|  | DX308T (DVB-T)    | 256 IP (MPTS/SPTS) input over UDP/RTP, 2 100/1000M Ethernet Port |   |               |
|  | DX306I (ISDBT)    | 192 IP (MPTS/SPTS) input over UDP/RTP, 2 100/1000M Ethernet Port |   |               |
|  | DX308AT (ATSC)    | 256 IP (MPTS/SPTS) input over UDP/RTP, 2 100/1000M Ethernet Port |   |               |
| <b>Multiplexing</b>                      |                   | DVB-C  | DVB-T/ ATSC   | ISDBT         |
|  | Input Channel     | 512  | 256   | 192           |
|  | Output Channel    | 16   | 8   | 6             |
|  | Max PIDs          | 180 per channel  |   |               |
|  | Functions         | PID remapping(auto/manually optional)                            |   |               |
|  |                   | PCR accurate adjusting   |   |               |
| <b>Scrambling Parameters (for DVB-C)</b> | Max simulcrypt CA | 4  |   |               |
|  | Scramble Standard | ETR289, ETSI 101 197, ETSI 103 197                               |   |               |
|  | Connection        | Local/remote connection  |   |               |
| <b>Modulation Parameters</b>             | DVB-C             |  | J.83A   | J.83B         |
|  |                   | Constellation  | 16/32/64/128/256 QAM                                  | 64QAM/ 256QAM |
|  |                   | Bandwidth  | 8M  | 6M            |
|  |                   | Standard   | EN300 429/ITU-T J.83A/B(DVB-C)                        |               |
|  |                   | Symbol rate  | 5.0~7.0Msps, 1ksps stepping                           |               |
|  |                   | QAM channel  | 16 non-adjacent carrier outputs within 192M bandwidth |               |
|  |                   | RF frequency   | 50~960MHz, 1KHz step                                  |               |
|  |                   | RF output level  | -20~+10dBm, 0.1dB step                                |               |
|  |                   | MER  | ≥ 40dB  |               |
|  |                   | FEC  | RS (204, 188)   |               |
|  | DVB-T             | Standard   | ETSI EN300 744  |               |
|  |                   | Constellation  | QPSK/16QAM/64QAM                                      |               |
|  |                   | Bandwidth  | 6/7/8 MHz   |               |
|  |                   | Trans mode   | 2K/4K/8K  |               |

|                  |  |                               |  |
|------------------|--|-------------------------------|--|
|                  |  | FEC                           | 1/2, 2/3, 3/4, 5/6, 7/8                              |
|                  |  | MER                           | $\geq 40\text{dB}$                                   |
|                  |  | RF frequency                  | 50~960MHz, 1kHz stepping                             |
|                  |  | RF output Level               | -20~+10dBm, 0.5dB stepping                           |
|                  |  | RF out channel                | 8 non-adjacent carrier outputs within 192M bandwidth |
|                  | ISDBT  | Standard                      | ARIB STD-B31   |
|                  |  | Bandwidth                     | 6M   |
|                  |  | Constellation                 | QPSK, 16QAM, 64QAM                                   |
|                  |  | Guard Interval                | 1/32, 1/16, 1/8, 1/4                                 |
|                  |  | Transmission Mode             | 2K, 4K, 8K   |
|                  |  | Code rate                     | 1/2, 2/3, 3/4, 5/6, 7/8                              |
|                  |  | MER                           | $\geq 40\text{dB}$                                   |
|                  |  | RF frequency                  | 50~960MHz, 1KHz step                                 |
|                  |  | RF output level               | -20dBm~+10dBm, 0.1dB stepping                        |
|                  |  | RF out                        | 6 non-adjacent carrier outputs within 192M bandwidth |
|                  | ATSC   | Standard                      | ATSC A/53  |
|                  |  | Bandwidth                     | 6M   |
|                  |  | Constellation                 | 8VSB   |
|                  |  | FEC                           | RS(208 188)+Trellis                                  |
|                  |  | MER                           | $\geq 40\text{dB}$                                   |
|                  |  | RF frequency                  | 50~960MHz, 1kHz step                                 |
| RF output level  |  | -20dBm~+10dBm, 0.5dB stepping |  |
| RF out           | 8 non-adjacent carrier outputs within 192M bandwidth   |                               |  |
| <b>TS output</b> | 16 (DVB-C)/ 8(DVB-T/ ATSC)/ 6(ISDBT) IP output over UDP/RTP/RTSP, unicast/multicast, 2*100/1000M Ethernet Ports (Data 1/2) |                               |  |
| <b>System</b>    | web-based NMS management thru module's NMS port  |                               |  |

|                |              |  |
|----------------|--------------|--|
| <b>General</b> | Demission    | 482mm×324mm×44mm (WxLxH)                     |
|                | Temperature  | 0~45°C (operation), -20~80°C (storage)       |
|                | Power Supply | AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz |