



NDS3904 Quad Decoder



Brief Introduction

NDS3904 quad decoder is DEXIN's new design 4-in-1 MPEG2 TS decoders. It supports 4 ASI input and after decoding progress, it outputs 4 separate A/V signal. It also support TS loop out over ASI port. This modularized design largely saves the cost of the transport freight, the space of frame rack and power consumption. In general, it can provide users with more convenient operating and maintenance experience.


Key Features

- 4 separate modules in 1U case
- 4 channels ASI input, 4 channels A/V output, 4 ASI loop out
- User-friendly and easy operating
- Auto-switching PAL/NTSC
- Auto-saving the latest channel

Technical Specifications

Signal Input		4×ASI (BNC interface)
Decoding Standard		MPEG-2
Video OUT		4×CVBS (RCA interface)
Audio OUT		4×Stereo Audio (L/R)
ASI Loop OUT		4×BNC interface
Miscellaneous	Management	LED /Control Buttons
	Dimension	44mm×482mm×410mm
	Temperature	0~45°C(Operating), -20~80°C(Storage)
	Power	AC 90~220V, 50/60Hz, 25W

Principle Chart

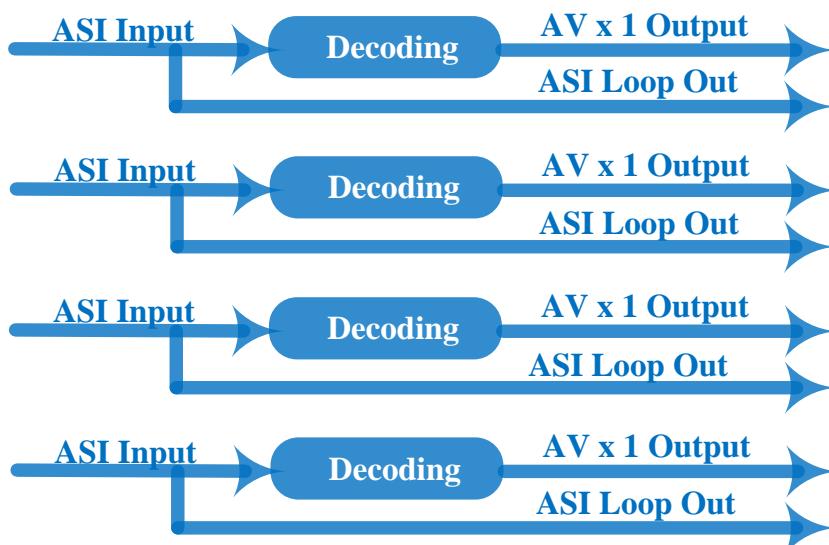

All the specifications are subject to change without any further notice. All rights reserved.

Add:No. 10&No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, PR China
www.dsdbv.com/English Tel: +86-028-85558928 Fax: +86-028-85585255 Email:sunyu@dsdbv.com