




NDS3348T

4 in 1 DVB-T Modulator



4 CI Slots = 4*CAM + 4*Smartcard

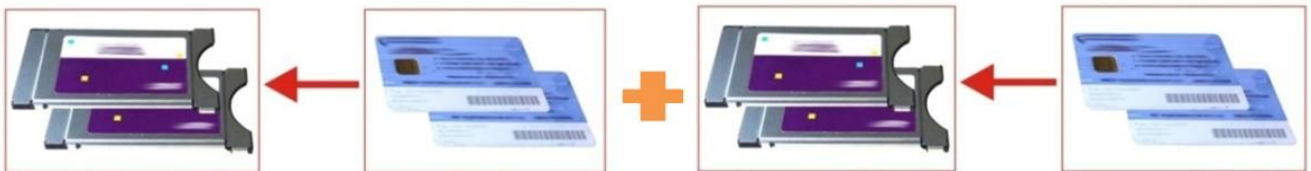

Outline

NDS3348T is a high performance and cost-effective DVB-T modulator designed by Dexin. It has 8 DVB-S2 tuner inputs, after multiplexing, scrambling and modulating process, then it gives 4 RF output. To meet customers' various requirements, this device is also equipped with 128 IP input and 4 MPTS output over UDP and RTP. Its pluggable structure design greatly facilitates the change of modules as needed. Moreover, the four CAMs/CIs accompanied can descramble the programs input from 8 Tuner inputs. NDS3348T can be upgraded and controlled through network system, which allows it to be widely used in setting up digital broadcasting network and provide good signals for scientific laboratory and DVB-T STB.




All the specifications are subject to change without any further notice. All rights reserved.

Add: No. 10 & No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, P.R. China
www.dsdtvb.com/English Tel: +86-028-85558928 Fax: +86-028-85585255 Email: sunyu@dsdtvb.com

Features

- 8 Tuner(DVB-S2) input
- Demodulation Module(4*RF/Loop out + 4*CAM + 4*Smartcard)
- One CAM can decrypt multiple programs from Tuners and IP
- maximum 128 IP input(MPTS/SPTS) over UDP and RTP protocol
- 4 groups multiplexing +4 groups DVB-T modulating
- 4 IP (MPTS) output over UDP and RTP protocol
- Integrated demodulating and multiplexing functions
- Support accurate PCR adjusting
- Support PID Remapping
- Support PSI/SI rebuilding and editing
- Web-based NMS management

Principle Chart

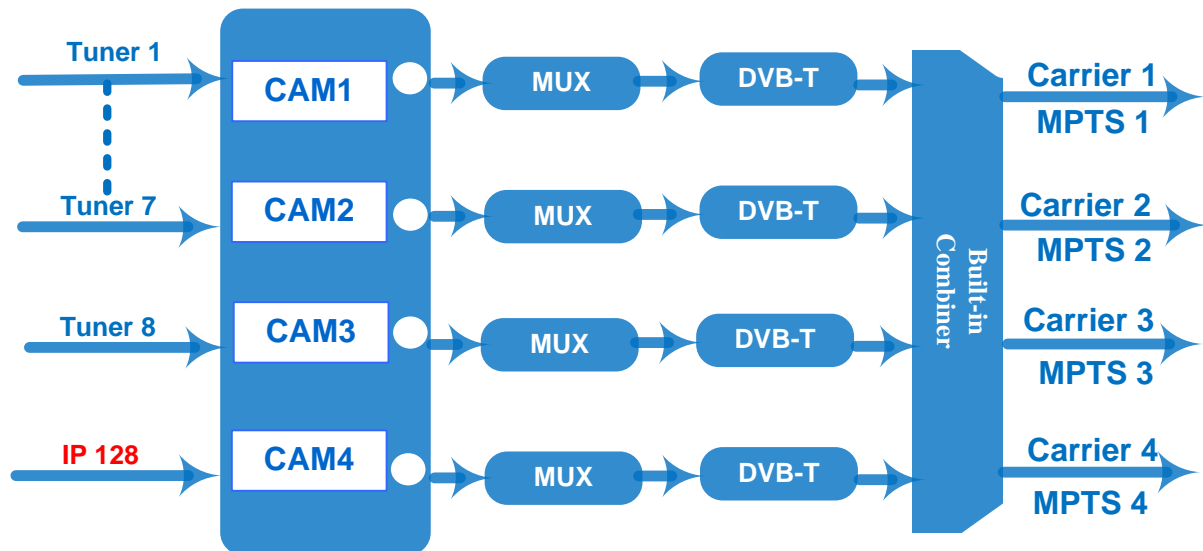

Specifications

Input	8 Tuner (DVB-S2) input		
	128 IP(SPTS/MPTS) input over UDP and RTP, RJ45, 1000M/100M Unicast/Multicast		
Tuner Section	DVB-S	Input Frequency	950-2150MHz
		Symbol rate	2-45Msps
		Signal Strength	-65~-25dBm
		FEC Demodulation	1/2, 2/3, 3/4, 5/6, 7/8 QPSK
	DVB-S2	Input Frequency	950-2150MHz

		Symbol rate	QPSK 1~45Mbauds; 8PSK 2~30Mbauds
		Code rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
		Constellation	QPSK, 8PSK
Descrambling	CAM/CI Quantity	4	
Multiplexing	Maximum PID Remapping	256 per input channel	
	Function	PID Remapping	
		Accurate PCR adjusting	
Generate PSI/SI table automatically			
Modulation	DVB-T	Standard	EN300744
		FFT mode	2K,
		Bandwidth	6M, 7M, 8M
		Constellation	QPSK, 16QAM, 64QAM
		Guard Interval	1/4, 1/8, 1/16, 1/32
		FEC	1/2, 2/3, 3/4, 5/6, 7/8
		MER	≥42 dB
		RF frequency	50~960MHz, 1KHz step
		RF out	4*RF COFDM DVB-T out (4 carriers combined output)
RF output level	-28~ -3 dBm (77~97 db μV), 0.1db step		
System	Remote management	Web NMS	
	Stream Out	4*MPTS over UDP and RTP out (RJ45, 1000M/100M Unicast/Multicast)	
	Language	English and Chinese	
	Software Upgrading	Web and USB	
General	Dimension (W*D*H)	482mm×300mm×44.5mm	
	Weight	3.7kg	
	Temperature	0~45°C (Operation) ; -20~80°C (Storage)	
	Power	AC 100V ±1050/60Hz; AC 220V ±10%, 50/60HZ	
	Consumption	25W	