



NDS3536S-N


DTV Processor



Product Overview

NDS3536S-N DTV processor is a high integration dual platform which includes DVB encoder/IRD-mux-modulator and IPTV streamer in one case. It supports 8/16/24 HDMI (or HDMI plus DVB-S/S2/S2X/C/T/T2/ISDB-T tuner mix input) inputs, 1 ASI input, 1 USB player input and 128 IP inputs via the GE port, and output by multiple DVB-C (or DVB-T/ATSC/ISDB-T optional) carrier channels. It also supports to convert the contents to IP streams out over multiple protocols to fit for internet transmission.

System Application

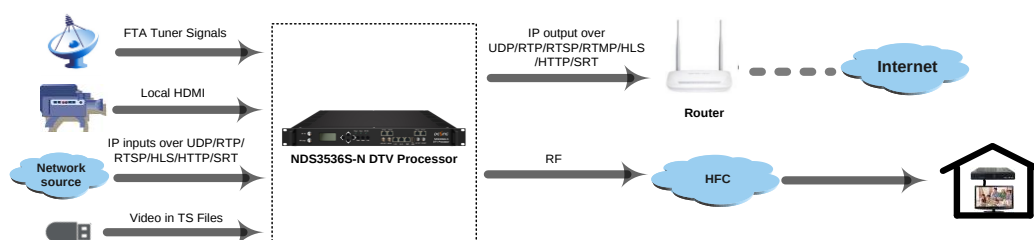


All the specifications are subject to change without any further notice. All rights reserved.

Add: No. 10 & No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, PR China

Key features

- DVB+IPTV dual platform in one case
- 8/16/24 HDMI (or HDMI plus DVB-S/S2/S2X/C/T/T2/ISDB-T tuner) inputs, HEVC/H.265 & MPEG-4 AVC/H.264 Video encoding
- 1 ASI input for re-mux, TS files input by external USB disk
- Support 32ch DVB-C RF out (16ch DVB-T, 16ch ATSC, or 16ch ISDB-T out for option, as per order)
- IP input over UDP/RTP/RTSP/HLS/HTTP/SRT
- Support MPTS IP output over UDP/RTP/RTSP, and SPTS out over UDP/HLS /HTTP /RTP /RTSP /RTMP /SRT Protocol
- Support LOGO, Caption and QR code insertion for local made channels
- Control via web management, and easy updates via web

Working Block

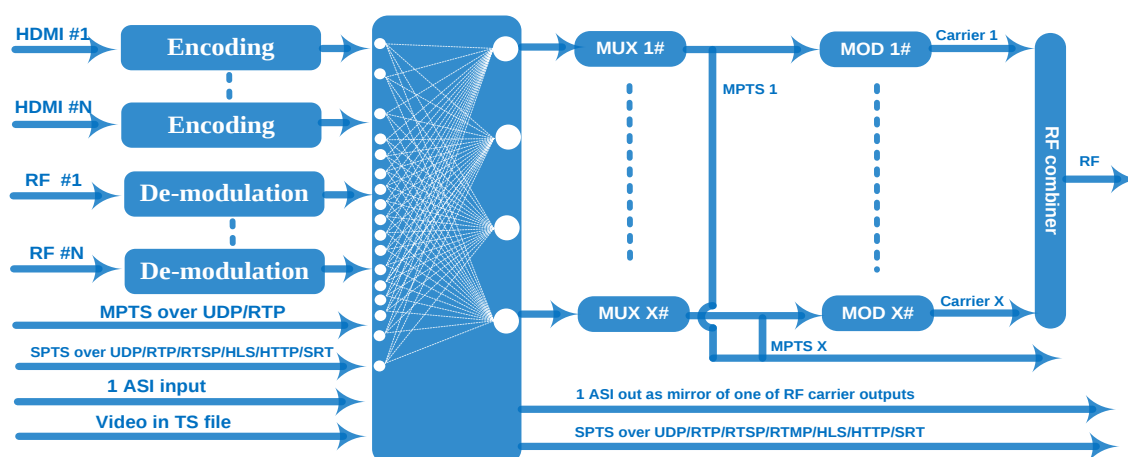

Technical Specifications

Input	8/16/24 HDMI inputs for option (or HDMI and different Tuner mix input, details pls check below order guide)		
	1 ASI in for re-mux		
	1 USB Player input for re-mux (“xxx.ts” video)		
	128 MPTS IP input over UDP and RTP, GE port, RJ45		
	SPTS input over UDP/RTP/RTSP/HLS/HTTP/SRT		
Video (HDMI Input)	Resolution	Input	1920×1080_60P, 1920×1080_60i, 1920×1080_50P, 1920×1080_50i, 1280×720_60P, 1280×720_50P, 720×576_50i,720×480_60i,
		Output	1920×1080_30P, 1920×1080_25P, 1280×720_30P, 1280×720_25P, 720×576_25P,720×480_30P,
	Encoding	HEVC/H.265 & MPEG-4 AVC/H.264	
	Bit-rate	1Mbps~13Mbps each channel	
	Rate Control	CBR/VBR	
	GOP Structure	IP...P (P Frame adjustment)	

Audio (HDMI Input)	Encoding	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass through	
	Sampling rate	48KHz	
	Resolution	24-bit	
	Audio Gain	0-255 Adjustable	
	MPEG-1 Layer 2 Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps	
	LC-AAC Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps	
	HE-AAC Bit-rate	48/56/64/80/96/112/128 kbps	
Tuner Section	DVB-S	Input Frequency	950-2150MHz
		Symbol Rate	0.5~45 Msps
		Constellation	QPSK
		FEC	1/2, 2/3, 3/4, 5/6, 7/8
	DVB-S2	Input Frequency	950-2150MHz
		Symbol Rate	QPSK/8PSK/16APSK: 0.5~45 Msps 32APSK:0.5~40 Msps
		Constellation	QPSK/8PSK/16APSK/32APSK
		FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9,9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9
		Max input bitrate	≤170 Mbps per tuner
	DVB-S2X	Symbol Rate	QPSK/8PSK/16APSK: 0.5~45 Msps; 8APSK/32APSK: 0.5~40 Msps
		Constellation	QPSK/8PSK/16APSK/8APSK/32APSK
		FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10,1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9
		Max input bitrate per tuner	≤170 Mbps
	Signal Strength	-65 ~ -25dBm	
Multiplexing	Maximum PID Remapping	255 input per channel	
	Function	PID remapping (automatically or manually)	
		Accurate PCR adjusting	
		Generate PSI/ SI table automatically	
Modulation	DVB-C	Standard	EN300 429/ITU-T J.83A/B
		RF output channel	32 non-adjacent carriers output (maximum bandwidth 384MHz)

		MER	≥40db	
		RF frequency	50~960MHz, 1KHz step	
		RF output level	-20~+1dbm, 0.1db step	
		Symbol Rate	5.0Msps~7.0Msps, 1ksps stepping	
			J.83A	J.83B
		Constellation	16/32/64/128/256QAM	64/256 QAM
		Bandwidth	8M	6M
	DVB-T	Standard	EN300744	
		FFT mode	2K,4K, 8K	
		Bandwidth	6M, 7M, 8M	
		Constellation	QPSK, 16QAM, 64QAM	
		Guard Interval	1/4, 1/8, 1/16, 1/32	
		Code Rate	1/2, 2/3, 3/4, 5/6, 7/8	
		MER	≥42 dB	
		RF frequency	50~960MHz, 1KHz step	
		RF output channel	16 non-adjacent carriers output (maximum bandwidth 192MHz)	
		RF output level	-20~ +1dBm, 0.1db step	
	ATSC	Standard	ATSC A/53	
		Bandwidth	6M	
		Constellation	8VSB	
		FEC	RS(208 188)+Trellis	
		MER	≥40dB	
		ACL	-55 dBc	
		RF frequency	50~960MHz, 1KHz step	
		RF output channel	16 non-adjacent carriers output (maximum bandwidth 192MHz)	
		RF output level	-20~+3dbm (for all carriers), 0.5db stepping	
	ISDB-T	Standard	ARIB STD-B31	
		Bandwidth	6M	
		Constellation	QPSK, 16QAM, 64QAM	
		Guard Interval	1/32, 1/16, 1/8, 1/4	
		FFT Mode	2K, 4K, 8K	
		Code rate	1/2, 2/3, 3/4, 5/6, 7/8	
		MER	≥40dB	
		RF frequency	50~960MHz, 1KHz step	
		RF output channel	16 non-adjacent carriers output (maximum bandwidth 192MHz)	
		RF output level	-20dBm~+1dBm, 0.1dB stepping	
MPTS output	1 ASI output as mirror of one of RF output carriers			
	32 MPTS output over UDP and RTP/RTSP as mirror of 32 DVB-C carriers(or 16 MPTS output over UDP and RTP/RTSP as mirror of 16 DVB-T/ATSC/ISDB-T carriers for option), 1*1000M Base-T Ethernet interface, GE port			
	SPTS over UDP/RTP/RTSP/RTMP/HLS/HTTP/SRT			

System function	Network management (WEB)	
	English language	
	Ethernet software upgrade	
Miscellaneous	Dimension (W ×L ×H)	482mm×328mm×44mm
	Environment	0~45℃(work); -20~80℃ (Storage)
	Power requirements	AC 110V±10%, 50/60Hz, AC 220 ±10%, 50/60Hz

Ordering Guide

Input Section:

	HDMI	DVB-S2 /S2X	DVB-C/T/T2/ ISDB-T
Option 1	8	/	/
Option 2	16	/	/
Option 3	24	/	/
Option 4	8	8	/
Option 5	8	16	/
Option 6	16	8	/
Option 7	8	/	8
Option 8	8	/	16
Option 9	16	/	8
Option 10	8	8	8
Option 11	16	4	4

Output Section:

RF output standard	RF carrier channels
DVB-C out	32
DVB-T out	16
ATSC out	16
ISDB-T out	16