



NDS3543D

DVB-S2X Encoder Modulator



Product Overview

NDS3543D DVB-S/S2/S2X Encoder & Modulator is an integrated device with multifunction. Its pluggable design makes it convenient to change encoding module (SDI/HDMI/YPbPr/CVBS...) as needed. It is also equipped with 1ASI input for re-mux and modulation.

The signal source could be from CCTV cameras, Blue-ray players and etc. It adopts user-friendly web-based operation interface to effectively manage the device and carefully protect your content with its BISS function. Featured with its high performance and low cost, NDS3543D is especially adequate for the TV station or DSNG system to encode SD/HD programs and output to uplink.

Key Features

- HEVC/H.265, MPEG-4 AVC/H.264, MPEG2 SD/HD Encoding Module optional
- SDI/HDMI/YPbPr/ CVBS...in & 1*ASI in
- Multiple channel audio inputs optional
- Support **DVB-S/S2/S2X** RF output (950-2150MHz) and ASI output
- QPSK, 8PSK, 16APSK, 32APSK Constellations
- **Support RF CID setting**
- Support RF 24V power output




All the specifications are subject to change without any further notice. All rights reserved.

Add: No. 10 & No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, P.R. China


www.dsdvb.com/English Tel: +86-028-85558928 Fax: +86-028-85585255 Email: sunyu@dsdvb.com

- Support Low latency
- Support BISS function
- Support 10MHz reference clock
- Support Web NMS and front panel LCD & Keyboard control
- Upgrade device through web NMS

CID TEST SAMPLE ILLUSTRATION

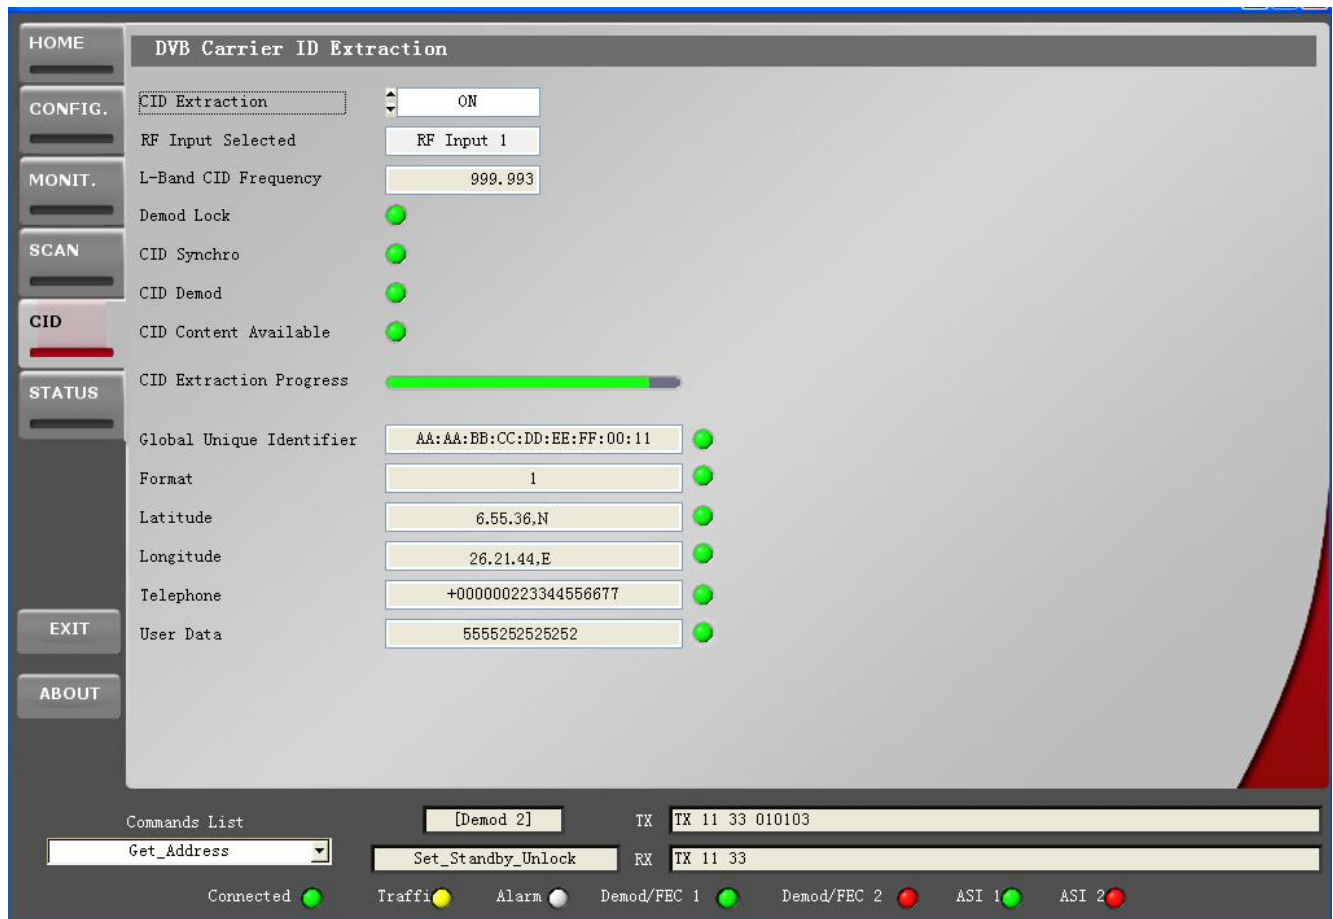

Principle Chart

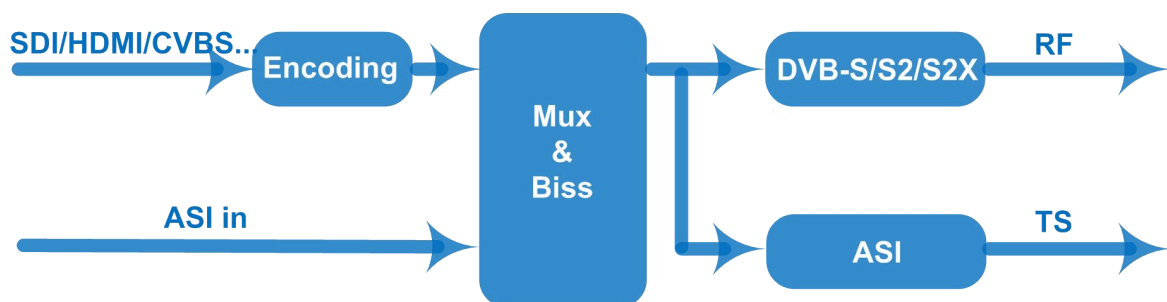

Technical Specifications

- H.265/H.264 video format
- Up to 4 stereo audio inputs
- OSD Insertion



OSD (Logo/QR Code) Insertion



Logo: support jpg/jpeg/bmp/gif/png file; drag to any position

QR Code: creat QR code quickly; add text/logo; custom size; drag to any position

Single HDMI/SDI/YPbPr Input

Video

Encoding	HEVC/H.265; MPEG-4 AVC/H.264		
Input	HDMI/SDI/YPbPr		
Resolution	Input	Output	Interface Applicable
	1920×1080_60P, 1920×1080_60i, 1920×1080_59.94P, 1920×1080_59.94i	1920×1080_60P	HDMI SDI
	1920×1080_50P, 1920×1080_50i	1920×1080_50P	
	1280×720_60P, 1280×720_59.94P,	1280×720_60P	
	1280×720_50P	1280×720_50P	
	1920×1080_60i, 1920×1080_50i, 1280×720_60P, 1280×720_50P	1920×1080_60i, 1920×1080_50i, 1280×720_60P, 1280×720_50P	YPbPr
	Bit rate	4Mbps~20Mbps (for MPEG-4 AVC/H.264) 0.5Mbps~20Mbps (HEVC/H.265)	

Chroma	4:2:0
Rate Control	CBR/VBR
GOP Structure	IBBP, IPPP
Advanced Pretreatment	De-interlacing, Noise Reduction, Sharpening

Audio

encoding	MPEG-1 Layer 2, LC-AAC, HE-AAC, HE-AAC V2, AC3 Passthrough
Input	Digital: HDMI/SDI/AES; Analog: XLR
Channel	AES/SDI: Up to 4 stereos
	HDMI: 1 stereo XLR: Up to 2 stereos
Sample rate	48KHz
Bit rate	48Kbps~384Kbps (MPEG-1 Layer 2 & LC-AAC)
	24 Kbps~128 Kbps (HE-AAC)
	18 Kbps~56 Kbps (HE-AAC V2)
Audio Gain	0-255



Video

Input	HDMI/SDI/YPbPr/ CVBS(CC only)
Encoding	MPEG2; MPEG4 AVC/H.264
Bit rate	1-19.5Mbps
Aspect Ratio	4:3, 16:9
Chroma	4:2:0
Resolution	1920*1080_60P, 1920*1080_50P, (-for MPEG4 AVC/H.264 only) 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P 720*480_60i, 720*576_50i

Audio

Interface	XLR, AES, SDI, HDMI(No YPbPr for video in)
Channel	maximum 2 stereos
encoding	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, AC3 AC3 Passthrough(only one audio in this case)
Sample rate	48KHz
Bit rate	64kbps, 96kbps, 128kbps, 192kbps, 256kbps, 320kbps



Single SDI Input

Video

Input	SDI*1
Encoding	MPEG2; MPEG4 AVC/H.264
Bit rate	1-19.5Mbps
AspectRatio	4:3, 16:9
Resolution	1920*1080_60P, 1920*1080_50P, (-for MPEG4 AVC/H.264 only) 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P 720*480_60i, 720*576_50i

Audio

encoding	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, AC3(Optional)
Sample rate	48KHz
Bit rate	64kbps, 96kbps, 128kbps, 192kbps, 256kbps, 320kbps



Single HDMI Input-Low latency

Video	
Input	HDMI*1
Encoding	MPEG2; MPEG4 AVC/H.264
Bitrate	1-19.5Mbps
Resolution	1920*1080_60P, 1920*1080_50P, (-for MPEG4 AVC/H.264 only) 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P 720*480_60i, 720*576_50i

Audio	
encoding	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC
Sample rate	48KHz
Bit rate	64kbps, 96kbps,128kbps, 192kbps, 256kbps, 320kbps



HDMI/YPbPr/CVBS Input

Video (HDMI)	
Interface	HDMI*1
Encoding	MPEG2; MPEG4 AVC/H.264
Bitrate	1-19.5Mbps
Resolution	1920*1080_60P, 1920*1080_50P, (-for MPEG4 AVC/H.264 only) 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P
Audio (HDMI)	
Encoding	MPEG1 Layer II; MPEG2-AAC; MPEG4-AAC
Interface	HDMI*1
Sample rate	48KHz
Bit rate	64/96/128/ 192/256/320kbps

Video (YPbPr/CVBS)	
Interface	YPbPr*1/CVBS *1
Encoding	MPEG2; MPEG4 AVC/H.264
Bitrate	1-19.5Mbps
Resolution	CVBS: 720x576_50i (PAL); 720x480_60i (NTSC) YPbPr: 1920*1080_60i, 1920*1080_50i; 1280*720_60p, 1280*720_50P
Audio (L/R)	
Encoding	MPEG1 Layer II; MPEG2-AAC; MPEG4-AAC
Interface	1*Stereo/2*mono
Sample rate	48KHz
Bit rate	64/96/128/ 192/256/320kbps



2*(S-Video + YPbPr + CVBS) Input

Video	
Encoding	Option 1: MPEG-2 MP@ML(4:2:0) Option 2: MPEG-2& MPEG-4 AVC/H.264 (4:2:0)
Input	2*S-Video/YPbPr/CVBS (RCA Type)
Resolution	720*576 (PAL); 720*480 (NTSC)
Bit rate	Option 1: 1~19.50 Mbps Option 2: 1~10.00 Mbps


Audio	
encoding	Option 1: MPEG1 Layer II Option 2: MPEG1 Layer II; LC-AAC; HE-AAC and Dolby Digital AC3 2.0(Optional)
Input	2 Stereo/Mono
Sample rate	48KHz
Bit rate	64kbps, 96kbps,128kbps, 192kbps, 256kbps, 320kbps

Generals

Input Interface	2*CVBS; 1*SDI; 1*HDMI; 1*(HDMI/SDI/YPbPr 3-in-1); 1*(HDMI/YPbPr/CVBS3-in-1) inputoptional ASI intput			
Output	DVB-S/S2/S2XRF output ;ASI output as mirror of RF			
Modulation Section	Standard	DVB-S	DVB-S2	DVB-S2X
	Outer coding	RS Coding	BCH Coding	BCH Coding
	Inner coding	Convolution	LDPC Coding	LDPC Coding
	Constellation	QPSK	QPSK,8PSK, 16APSK,32APSK	QPSK,8PSK, 8APSK, 16APSK, 32APSK
	FEC/ Convolution Rate	1/2,2/3, 3/4, 5/6, 7/8	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK:2/3,3/4, 4/5, 5/6, 8/9,9/10 32APSK:3/4, 4/5, 5/6, 8/9,9/10	QPSK:1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK:3/5, 2/3, 3/4, 5/6, 8/9, 9/10 ,23/36, 25/36, 13/18 8APSK:5/9-L,26/45-L 16APSK:2/3,3/4, 4/5, 5/6, 8/9,9/10 , 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36 , 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK:3/4, 4/5, 5/6, 8/9,9/10, 2/3-L, 32/45, 11/15, 7/9
	Roll-off Factor	0.2,0.25,0.35	0.2, 0.25, 0.35	0.05, 0.10, 0.15, 0.2, 0.25, 0.35
	Symbol Rate	0.5~45Msps	0.5~40Msps (32APSK); 0.5~45Msps (QPSK/8PSK/16APSK)	0.5~40Msps(32APSK); 0.5~45Msps (QPSK/8PSK /8APSK/16APSK)
	RF range	950-2150MHz		
	Output level	+3dBm~-28.5dBm		
BISS	Mode1, Mode E			
System	Local Control	LCD + control buttons		
	Remote Control	Web NMS		
	Low Latency Mode	Normal, Mode 1, Mode 2		
	Language	English		
Physical	Demission	410×460×44mm(W*L*H)		

Spec	Temperature	0~45℃(operation), -20~80℃(storage)
	Power Supply	AC 100-240V 50/60Hz 2A

System Connection Sample

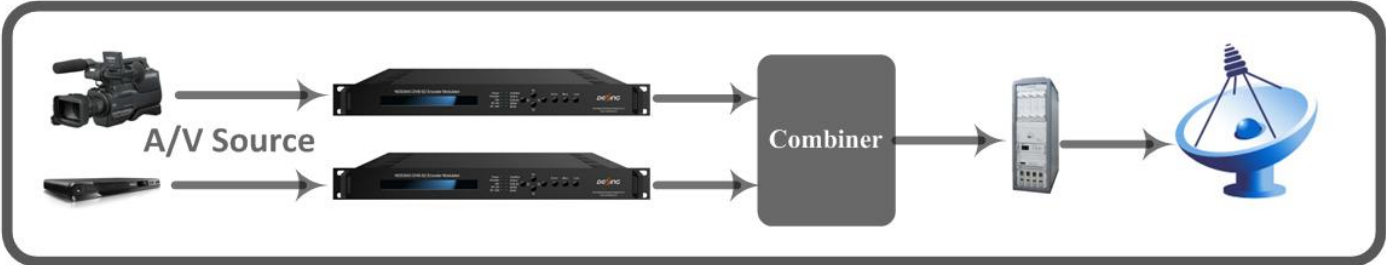

Order Guide

	NDS3543A	NDS3543C	NDS3543D
DVB-S/S2	●	●	●
DVB-S2X			●
RF Output(950-2150MHz)		●	●
IF Output(50-200 MHz)	●		