



NEP100-A

IP Streamer

Multiple Inputs (HDMI+Tuner+IP over Multi-Protocol+TS file) + Multi-Protocol Conversion + IPTV Server



1U Chassis with 3 card slots



3U Chassis with 6 card slots




All the specifications are subject to change without any further notice. All rights reserved.


Add: No. 10 & No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, PR China  
www.dsdvb.com/English Tel: +86-028-85558928 Fax: +86-028-85585255 Email: sunyu@dsdvb.com

## Application Example

### IPTV System as a Server

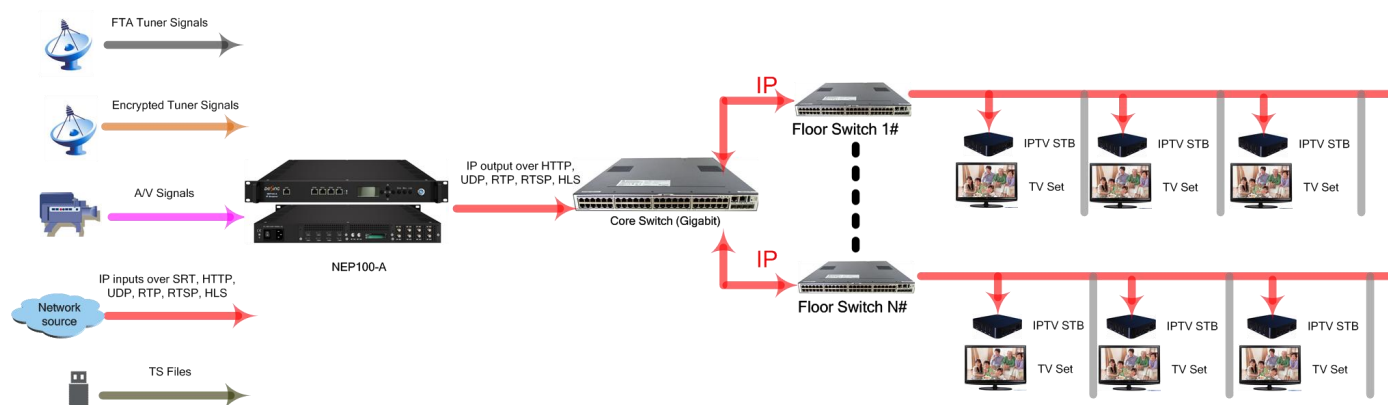

### Protocol Conversion as a Streamer

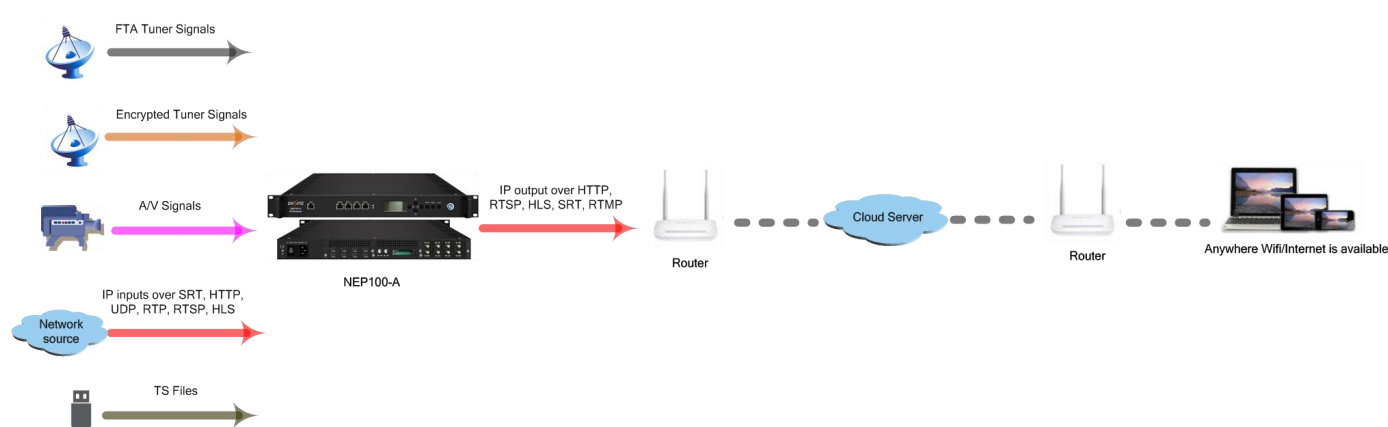


## Outline

NEP100-A is a flexibly modularized 1U (or 3U) device with the features of Encoder/Receiver, IP Gateway and IPTV Server for the protocol-conversion application and IPTV-system application. It supports max 3 (or 6) pluggable streamer cards embedded, such as encoder card and tuner card to receive the HDMI signals and tuner signals etc. It can also convert the input IP streams from the embedded modules and Ethernet ports over SRT, HTTP, UDP, RTP, RTSP, HLS protocol and TS files into the output IP streams over SRT, HTTP, UDP, RTP, RTSP, HLS and RTMP protocol. It is also integrated with Dexin IPTV management software and Streamer cards to make it ideal in an IPTV system, such as hotel, hospital and community.

## Key Features

- Encoder/Receiver, IP Gateway and IPTV Server in one device
- 2 separate Web GUI, one for Cards and Gateway, the other for IPTV Server
- Support uploading TS files directly in Web GUI to broadcast your own channels
- Support inter-cut feature of a live program, a TS file and a picture
- Support IP anti-jitter feature for the external IP streams
- Support downloading Dexin IPTV APK directly in the Web GUI
- Multi-level password control for your system security
- LCD/Key button for Network-Setting checking
- Modularized design, max 3 (or 6) cards embedded, a flexible option as per the actual application

## IP Protocol Conversion (example)

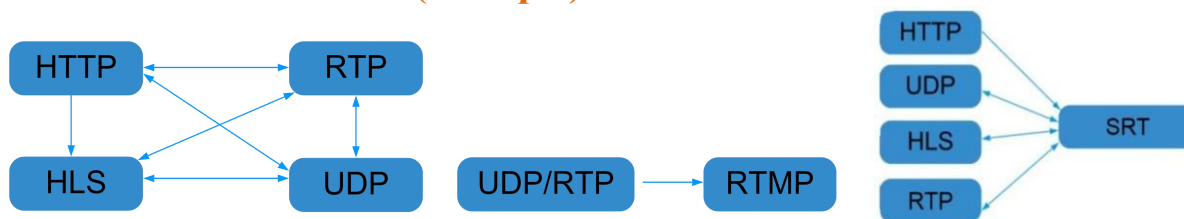

## Specifications

<b>Input</b>	IP inputs thru ETH 1&2, GE ports over SRT,HTTP, UDP (SPTS), RTP(SPTS), RTSP (over UDP, payload: mpeg TS) and HLS	For 1U model
	IP inputs thru ETH 1-4 GE ports & 6-7 SFP+ ports over SRT,HTTP, UDP (SPTS), RTP(SPTS), RTSP (over UDP, payload: mpeg TS) and HLS	For 3U model
	TS files uploading through Web management	
	Encoder card and Tuner card etc (Please refer to the detailed card spec below)	
<b>IP output</b>	IP outputs thru ETH0, GE port over SRT, HTTP (Unicast), UDP(SPTS, Multicast) , RTP, RTSP, HLS and RTMP (Program source should be H.264 and AAC encoding)	
<b>System</b>	Channel switching time with DEXIN' STB: HTTP (1-3s), HLS (0.4-0.7s)	
	It is closely related with the program bitrate and protocol type etc for Max program numbers involved in protocol conversion, and the actual application shall prevail with maximum 80% CPU utilization (Please refer to Test data for reference in the end of the spec)	
	It is closely related with the program bitrate and protocol type etc for Max affordable terminal numbers in IPTV application of the STB/Android TV installed with Dexin IPTV APK, and the actual application shall prevail with maximum 80% CPU	

	utilization (Please refer to Test data for reference in the end of the spec)	
	IPTV Features: Live channel, VOD, Hotel intro, Dining, Hotel service, Scenery intro, APPS, Adding scrolling caption, welcome words, pictures, advertisement, video, music etc (the features are only applicable to IP out application in the STB/Android TV installed with Dexin IPTV APK)	
<b>General</b>	Demission (WxLxH)	482mm×464mm×44mm (1U model) 482mm×493mm×133mm (3U model)
	Management	2 separate Web GUI (one for Cards and Gateway, the other for IPTV Server) through ETH3 (3U model through ETH5)
	Temperature	0~45°C (operation), -20~80°C (storage)
	Power Supply	AC100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz

## Available Card Specification (more available cards later for development)

### DX902A 2 Tuner Descrambling Card



Stream in:

2 Tuner input, F Type,

Stream out:

16 SPTS output over UDP/RTP

DVB-CI:

2 independent common interface slots

Standard:

DVB-S/S2/S2X;

DVB-S

Input Frequency: 950-2150MHz

Symbol Rate: QPSK 1~45Msps

Signal Strength: -65~ -25dBm

FEC Demodulation: 1/2, 2/3, 3/4, 5/6, 7/8

DVB-S2

Input Frequency: 950-2150MHz

Symbol rate: QPSK/8PSK 1~45Msps, 16APSK 1~45 Msps, 32APSK 1~32 Msps

FEC Demodulation: 1/2, 2/3, 3/4, 5/6, 7/8, 4/5, 5/6, 8/9, 9/10

DVB-S2X

Input Frequency: 950-2150MHz

Symbol rate: QPSK/8PSK/16APSK 0.5~45 Msps; 8APSK/32APSK: 0.5~40Msps



All the specifications are subject to change without any further notice. All rights reserved.

FEC Demodulation:

QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20

8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18

8APSK: 5/9-L, 26/45-L

16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90

32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9

Support Diseqc function

### **Multiplexing:**

Maximum PID Remapping: 256 output pids

Function: PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/ SI table automatically

### **Descrambling:**

CAM/CI Quantity: 2

BISS Mode: Mode 1, Mode E; 32 BISS Keys

## **DX942A 4 frequencies Descrambling Card**



Stream in:

4 frequencies input(each RF in interface for 2 frequencies locking), F Type,

Stream out:

16 SPTS output over UDP/RTP

DVB-CI:

2 independent common interface slots

Standard: DVB-C (J.83 A/C)/J.83B/ DVB-T/DVB-T2/ISDB-T switchable

Standard: DVB-C (J.83 A/C); J.83B

Input Frequency: 60MHz~890MHz

Symbol rate: 1000~9000Ksps

Constellation: 16/32/64/128/256 QAM; 64/256 QAM for J.83B

Standard: DVB-T/T2

Frequency In: 60MHz~890MHz

Bandwidth: 5/6/7/8M bandwidth

PLP supported for DVB-T2

Standard: ISDB-T

Input Frequency:60-890MHz

### **Multiplexing:**

Maximum PID Remapping: 256 output pids



All the specifications are subject to change without any further notice. All rights reserved.

Add: No. 10 & No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, P.R. China

www.dsdrv.com/English Tel: +86-028-85558928 Fax: +86-028-85585255 Email: sunyu@dsdrv.com


Function: PID remapping (automatically or manually), generate PSI/ SI table automatically

**Descrambling:**

CAM/CI Quantity: 2

BISS Mode: Mode 1, Mode E; 32 BISS Keys

**DX228S 8 HDMI Encoder Card**

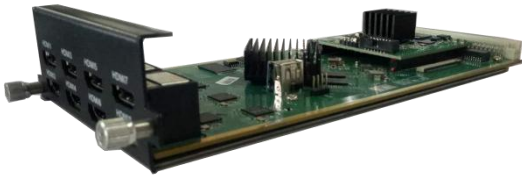

Input: 8\*HDMI (4 HDMI is available)

Output: 8\*SPTS (4 SPTS if 4 HDMI) output over UDP/RTP/RTSP, Unicast/Multicast

**Video Encoding:**

Video format: MPEG-4 AVC/H.264

Input resolution: 1920×1080\_60P, 1920×1080\_60i, 1920×1080\_50P, 1920×1080\_50i, 1280×720\_60P, 1280×720\_50P, 720×576\_50i, 720×480\_60i,

Output resolution: 1920×1080\_30P, 1920×1080\_25P, 1280×720\_30P, 1280×720\_25P, 720×576\_25P, 720×480\_30P,

GOP structure: IP...P (P Frame adjustment, without B Frame)

Video Bit-rate: 1Mbps~13Mbps each channel

Rate Control: CBR/VBR

**Audio Encoding:**

Audio format: MPEG1 Layer II, LC-AAC, HE-AAC and AC3 Pass through, support audio gain adjustment

Sampling rate: 48 KHz

Audio Bit-rate:

MPEG-1 Layer 2: 48/56/64/80/96/112/128/160/192/224/256/320/384 kbps

LC-AAC: 48/56/64/80/96/112/128/160/192/224/256/320/384 kbps

HE-AAC: 48/56/64/80/96/112/128 kbps

Support Logo, Caption, QR Code insertion

**DX228S-V2 8 HDMI Encoder Card**



Input: 8\*HDMI (4 HDMI is available)

Output: 8\*SPTS (4 SPTS if 4 HDMI) output over UDP/RTP/RTSP, Unicast/Multicast

**Video Encoding:**

Video format: HEVC/H.265, MPEG-4 AVC/H.264



All the specifications are subject to change without any further notice. All rights reserved.

Add: No. 10 & No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, PR China

www.dsdivb.com/English Tel: +86-028-85558928 Fax: +86-028-85585255 Email: sunyu@dsdivb.com

Input resolution: 1920×1080\_60P, 1920×1080\_60i, 1920×1080\_50P, 1920×1080\_50i, 1280×720\_60P, 1280×720\_50P, 720×576\_50i, 720×480\_60i,

Output resolution: 1920×1080\_30P, 1920×1080\_25P, 1280×720\_30P, 1280×720\_25P, 720×576\_25P, 720×480\_30P,

GOP structure: IP...P (P Frame adjustment, without B Frame)

Video Bit-rate: 1Mbps~13Mbps each channel

Rate Control: CBR/VBR

#### **Audio Encoding:**

Audio format: MPEG1 Layer II, LC-AAC, HE-AAC and AC3 Pass through, support audio gain adjustment

Sampling rate: 48 KHz

Audio Bit-rate:

MPEG-1 Layer 2: 48/56/64/80/96/112/128/160/192/224/256/320/384 kbps

LC-AAC: 48/56/64/80/96/112/128/160/192/224/256/320/384 kbps

HE-AAC: 48/56/64/80/96/112/128 kbps

Support Logo, Caption, QR Code insertion

### **DX908 8 FTA DVB-S/S2/S2X Tuner Card**



Stream in: 8 Tuner input, F Type,

Stream out: 512 SPTS out over UDP/RTP/RTSP, Unicast/Multicast

Tuner input: DVB-S/S2/S2X

Symbol rate: QPSK/8PSK/16APSK 0.5~45 Msps; 8APSK/32APSK: 0.5~40Msps

Input Frequency: 950-2150MHz

DVB-S Constellation: QPSK

FEC Demodulation: 1/2, 2/3, 3/4, 5/6, 7/8

DVB-S2 Constellation: QPSK/8PSK/16APSK/32APSK

FEC Demodulation:

QPSK: 1/2, 2/3, 3/4, 5/6, 3/5, 4/5, 8/9, 9/10

8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10

16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10

32APSK: 3/4, 4/5, 5/6, 8/9, 9/10

DVB-S2X Constellation: QPSK/8PSK/8APSK/16APSK/32APSK

FEC Demodulation:

QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20

8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18

8APSK: 5/9-L, 26/45-L

16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90

32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9, 9/10



All the specifications are subject to change without any further notice. All rights reserved.

Add: No. 10 & No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, PR China

www.dsdrv.com/English Tel: +86-028-85558928 Fax: +86-028-85585255 Email: sunyu@dsdrv.com

Support Diseqc function

**Multiplexing:**

Maximum PID Remapping: 256 output pids

Function: PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/ SI table automatically

**Descrambling:**

BISS Mode: Mode 1, Mode E; up to 120Mbps, 32 BISS Key

**DX928 8 FTA DVB-C/T/T2/ISDB-T Multi-Mode Tuner Card**



Stream in: 8 tuner input, F Type

Stream out: 512 SPTS out over UDP/RTP/RTSP, Unicast/Multicast

Tuner input: DVB-C (J.83 A/C)/J.83B/ DVB-T/DVB-T2/ISDB-T switchable

Standard: DVB-C (J.83 A/C); J.83B

Input Frequency: 60MHz~890MHz

Symbol rate: 1000~9000Ksps

Constellation: 16/32/64/128/256 QAM; 64/256 QAM for J.83B

Standard: DVB-T/T2

Frequency In: 60MHz~890MHz

Bandwidth: 5/6/7/8M bandwidth

PLP Index:0~255 for DVB-T2

Standard: ISDB-T

Input Frequency:60-890MHz

**Multiplexing:**

Maximum PID Remapping: 256 output pids

Function: PID remapping (automatically or manually), generate PSI/ SI table automatically

**Descrambling:**

BISS Mode: Mode 1, Mode E; up to 120Mbps, 32 BISS Keys

**DX908 V2 8 FTA DVB-S/S2/S2X Tuner Card**



All the specifications are subject to change without any further notice. All rights reserved.

Address: Add.No. 10&No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, PR China  
Website: [www.dsdlvb.com/English](http://www.dsdlvb.com/English) Telephone: Tel: +86-028-85558928 Fax: +86-028-85585255 Email: [sunyu@dsdlvb.com](mailto:sunyu@dsdlvb.com)





Stream in: 8 Tuner input, F Type, **with loop out**

Stream out: 512 SPTS out over UDP/RTP/RTSP, Unicast/Multicast

Tuner input: DVB-S/S2/S2X

Symbol rate: QPSK/8PSK/16APSK 0.5~45 Msps; 8APSK/32APSK: 0.5~40Msps

Input Frequency: 950-2150MHz

DVB-S Constellation: QPSK

FEC Demodulation: 1/2, 2/3, 3/4, 5/6, 7/8

DVB-S2 Constellation: QPSK/8PSK/16APSK/32APSK

FEC Demodulation:

QPSK: 1/2, 2/3, 3/4, 5/6, 3/5, 4/5, 8/9, 9/10

8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10

16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10

32APSK: 3/4, 4/5, 5/6, 8/9, 9/10

DVB-S2X Constellation: QPSK/8PSK/8APSK/16APSK/32APSK

FEC Demodulation:

QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20

8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18

8APSK: 5/9-L, 26/45-L

16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90

32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9, 9/10

Support Diseqc function

### Multiplexing:

Maximum PID Remapping: 256 output pids

Function: PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/ SI table automatically

### Descrambling:

BISS Mode: Mode 1, Mode E; up to 120Mbps, 32 BISS Key

### Test data for reference (1U model):

Protocol conversion	Programs	Bitrate	Terminals	CPU utilization
UDP to HTTP	60	8M	100	80%
UDP to HLS	60	8M	120	65%
UDP to HTTP	60	2M	400	80%
UDP to HLS	60	2M	400	40%



All the specifications are subject to change without any further notice. All rights reserved.

Add: No. 10 & No. 12, Wuxing Fourth Road, Wuhou District, Chengdu 610045, Sichuan, PR China

www.dsdlvb.com/English Tel: +86-028-85558928 Fax: +86-028-85585255 Email: sunyu@dsdlvb.com

UDP to SRT	45	8M	---	80%
UDP to RTMP	50	8M	---	80%

**Test data for reference (3U model):**

Protocol conversion	Programs	Bitrate	Terminals	CPU utilization
UDP to HTTP	150	8M	600	82%
UDP to HLS	150	8M	1300	30%
UDP to SRT	130	8M	---	75%
UDP to RTMP	150	8M	---	80%